arXiv:1606.02103v1 [cond-mat.other] 7 Jun 2016

High Q-value quartz piezo-resonator at mK temperatures: influence of van der Waals interaction

M. Človečko, P. Skyba, and F. Vavrek

Centre of Low Temperature Physics, Institute of Experimental Physics,

SAS and P. J. Šafárik University Košice,

Watsonova 47, 04001 Košice, Slovakia.

(Dated: June 8, 2016)

Abstract

We present the measurements of the high Q-value piezo-resonator (quartz tuning fork) in vacuum and millikelvin temperature range. Using a pulse excitation and demodulation detection technique, we were able (i) to measure the resonance frequency of the quartz tuning fork with resolution in frequency in the 9th order and (ii) to detect reproducible temperature dependence of the tuning fork resonance frequency in temperature range from 20 mK to 600 mK. We also present a simple theoretical model. Its comparison with experimental data suggests that this striking temperature dependence of the tuning fork resonance frequency is related to the van der Waals interaction acting between oscillating electric dipoles, thus preserving their phase rigidity i.e. their phase coherence. Moreover, we show that the high Q-value quartz tuning fork can also be excited using the white noise.

Mechanical resonators of various forms (macro, MEMS, NEMS) are extremely useful experimental tools used for study not only physical properties of the environments, which they are in contact with, but they also may hide very interesting physical properties themselves. Recently, MEMS and NEMS in particular are physical objects of intensive study mainly from the point of view of non-linear processes [1–6] and frequency fluctuations [7]. We focused our investigation on piezoelectric resonators (quartz tuning forks) being intensively used in physics of superfluids (^{3}He and ^{4}He), AFM and STM techniques, etc. [8–11].

It is generally known that when a standard 32 kHz quartz tuning fork oscillating in vacuum is cooled down, the fork undergoes a transition to the high Q-value oscillation mode in the temperature region between 5 K and 1 K, reaching the Q-value up to the order of 10^6 [8, 12]. In order to measure quartz tuning fork with high Q-value, instead of using traditional technique of the frequency sweep with continuous voltage excitations, we adapted and applied a pulse-demodulation technique. This type of measurement technique allows us to detect a decay signal from the free oscillating quartz tuning fork with high sensitivity of the signal frequency measurement.

We used a standard 32 kHz quartz tuning fork with the prong width $W = 400\,\mu$m, the wafer thickness $T = 230\,\mu$m and length $L = 3117\,\mu$m. Before its installation the tuning fork has been removed from original cap and the former (magnetic) wires were replaced by copper wires of diameter of $120\,\mu$m. These copper wires were electrically connected to tuning fork's pads using a conductive silver epoxy and glued to small piece of Stycast 1266 - epoxy impregnated paper in order to achieve a mechanical stiffness of the set-up. The cooling of the tuning fork was ensured by clamping two copper wires between two copper blocks and these blocks were screwed to the experimental plate. Thermal connection of the experimental plate to the mixing chamber of the cryogen-free dilution refrigerator Triton 200 was provided by three silver rods, each having diameter of 4 mm.

A measurement set-up consists of a programmable function generator operating in pulse mode, which excites the tuning fork by N pulses (typically 200-250 pulses) at resonance frequency and effective amplitude of 5 mV. Free oscillations of the tuning fork at resonance frequency f_{tf} generate alternating piezoelectric current being detected by a custom-made current-to-voltage (I/V) converter in order to minimize the losses in detection circuit [13, 14]. The I/V converter output voltage signal is then measured by a lock-in amplifier operating at the reference frequency f_{ref} provided by a second, precise programmable reference generator.

The lock-in amplifier multiplies the measured and reference signals, and built-in active filters suppress the $(f_{tf} + f_{ref})$ component and amplify the $(f_{tf} - f_{ref})$ component, assuming that the filter time constant $\tau_f > 1/(2\pi(f_{tf} - f_{ref}))$. Both output signals from the lock-in amplifier (in-phase and quadrature) oscillate at frequency $f_{sig} = (f_{tf} - f_{ref})$ and they are measured by two fast digital multimeters triggered by the excitation pulse. In such way, the lock-in transforms the signal from relatively high frequency range to the low frequency range. This allows to reduce the sampling rate without losing information on the signal frequency and to increase the sensitivity of the frequency measurements. The advantage of this technique, from viewpoint of the precision of the frequency determination for linear systems is obvious. Let us assume that the signal being detected at frequency f_{sig} (e.g. $\sim 3\,\mathrm{Hz}$) is measured with fast digital multimeter with sampling frequency f_{samp} (e.g. 1000 samples per second) and that signal lifetime, T_s, is approximately 100 seconds. Then, the signal frequency can be determined by the fit with precision determined by $f_{sig}/(f_{samp}.T_s)$, i.e. for the numbers given the precision is $30\,\mu\mathrm{Hz}$. Traditional FFT technique applied on this signal allows to determine the frequency with precision of the order of 10 mHz. Keeping in mind that the original signal frequency is of the order of 32 kHz, precision of 30μHz gives the frequency resolution in the 9th order.

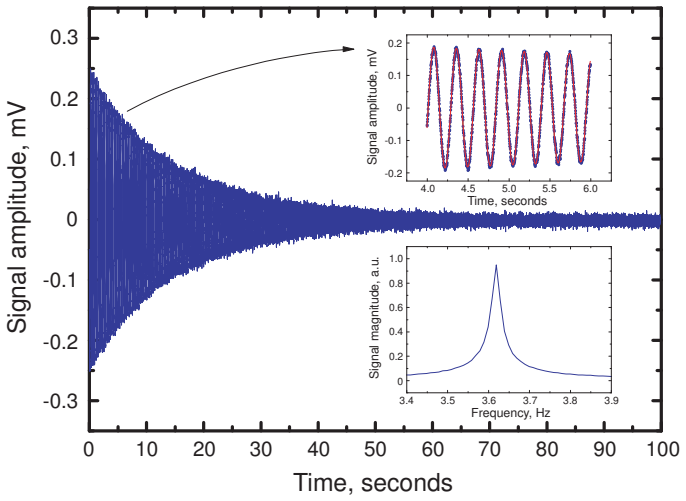

FIG. 1: (Colour online) Free decay signal of the tuning fork oscillations. The I/V converter gain factor is 10^5V/A. Insets: a time window showing the fit (red line) to experimental data (points) using equation (1) (top), the FFT of the presented signal showing the precision of the resonance frequency determination (bottom).

Figure 1 shows the decay signal of the tuning fork's free oscillations measured in vacuum at temperature of 25 mK. The deposited energy (250 pulses with 5 mV_{RMS} amplitude) used to excite the fork is equal to $33{\cdot}10^{-15}$ Joule. The decay signal is fitted using expression

$$V(t) = V(0)\, e^{-\frac{t}{\tau}} \sin(2\pi f t + \phi), \tag{1}$$

where fitting parameters $V(0)$ is the initial amplitude of the signal, τ is the relaxation time constant characterizing a damping process, f is the signal frequency (f_{sig}) and ϕ is the phase. The tuning fork's high Q-value is demonstrated by a long duration of the decay signal of the order of 100 seconds.

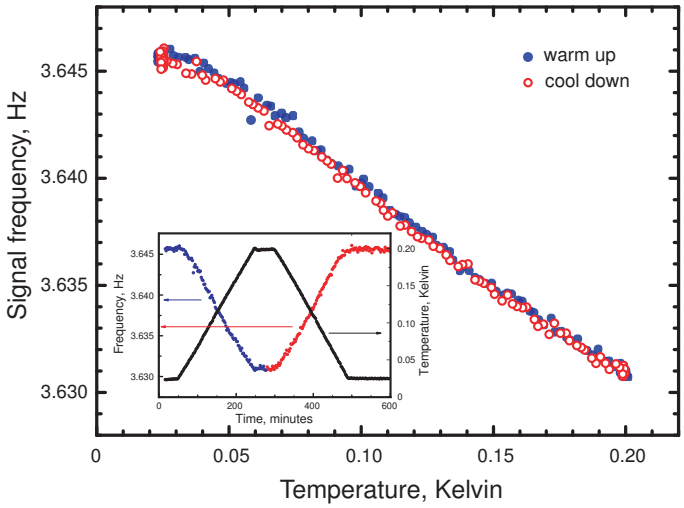

FIG. 2: (Colour online) Dependence of the tuning fork resonance frequency measured using the reference frequency of f_{ref}=32769.0 Hz as a function of the mixing chamber temperature during warming up and subsequent cooling down process. Inset shows the evolution of the resonance frequency (black) and temperature (red and blue) in time.

Figure 2 shows a measured temperature dependence of the fork resonance frequency during sequential temperature up and down sweeps of the dilution refrigerator in temperature range between 22 mK and 200 mK. Temperature of the mixing chamber was measured using calibrated RuO_2 thermometer and the rate of the temperature sweep was 1 mK per minute. The inset to Fig. 2 demonstrates how the tuning fork resonance frequency follows the temperature change of the mixing chamber. During the warm up process, the resonance frequency of the tuning fork decreases. At constant temperature, the resonance frequency

stays constant and on subsequent cooling process, the resonance frequency rises. There is a small time delay between the change in temperature of the mixing chamber and the change in the resonance frequency of the tuning fork due to a thermal resistance. What could be a physical origin of the effect of frequency change with temperature?

Free oscillating motion of one beam of the tuning fork pointing in the direction of z-axis in zero magnetic field is described by the Euler-Bernoulli equation

$$\rho A\frac{\partial^2 x}{\partial t^2} + 2\gamma\rho A\frac{\partial x}{\partial t} + E_m J_y\frac{\partial^4 x}{\partial z^4} = 0, \tag{2}$$

including initial conditions, where A is the beam cross-section, ρ is the quartz density, E_m is the Young's modulus of the material, J_y is the moment of inertia of the beam and γ characterizes the damping process. Third therm represents the restoring force and together with the beam mass and geometrical parameters determines the vacuum resonance frequency of the tuning fork

$$f_0^2 = \left(\frac{1.015\cdot W}{2\pi\, L^2}\right)^2 \frac{E_m}{\rho} = \frac{1}{4\pi^2}\frac{k}{m_{eff}}, \tag{3}$$

where W and L is the width and the length of the tuning fork beam, respectively, m_{eff} is the effective mass of the beam and k is the spring constant.

According to equation (2), observed temperature dependence of the tuning fork resonance frequency (see Fig. 2 and Fig. 3) could be a consequence of either a temperature dependence of Young modulus $E_m(T)$ (or spring constant $k(T)$) or an influence of temperature dependent damping process $\gamma(T)$, or combination of both. As the temperature range of measurements is below 1 K, we assume that the geometrical dimensions of the tuning fork are constant. Let us firstly discuss the physical origin of possible effects leading to temperature dependence of Young's modulus (or spring constant) and neglect the influence of the dissipation processes on tuning fork resonance frequency for a while (as it will be seen below, dissipation process does not affect the tuning fork resonance frequency).

Conventionally, the temperature dependence of E_m for some oxides can be expressed applying the model presented by J. B. Wachtman et al.[15, 16]

$$E_m(T) = E_m(0) - B\cdot T e^{-\frac{T_0}{T}}, \tag{4}$$

where $E_m(0)$ represents Young's modulus at T$\rightarrow$0 K, the Boltzmann factor $exp(-T_0/T)$ is related to the degree of excitation of the vibrational modes and B and T_0 are empirical parameters. Substituting expression (4) into equation (3), the formula for the tuning fork

resonance frequency gets two terms: temperature-independent and temperature-dependent one. The fit to the experimental data using formula $f^2(T) = a + b \cdot Te^{-T_0/T}$ is shown in Fig. 3 by dashed line (fitting parameters: a, b and T_0). Although experimental data of the temperature dependence of the fork resonance frequency can be fitted using this model, the fitting parameter $T_0 = 600\mu K$ does not have physical relevance. Previous measurements of the Young's modulus as a function of temperature showed that parameter T_0 should be in the range of half Debye temperature T_D (Debye temperature $T_D = 470\,\mathrm{K}$ for quartz) [17], and the model presented by (4) is applicable in temperature range above 10 K.

However, in contrast to a classical mechanical oscillator, there are oscillating electric dipoles $\mathbf{p} = Q\mathbf{d} = \alpha(T)\mathbf{E}_{loc}$ (Q is the charge and $\mathbf{d} = 2\mathbf{x}$ is the distance between charges) in the tuning fork, and each of them experiences a local electric field with intensity $\mathbf{E}_{loc}$ produced by the other electric dipoles (and initial electric pulse). Once the electric dipole moment $\mathbf{p}$ is formed, the restoring force of magnitude

$$F_{loc} = \frac{2\,Q^2 x}{\alpha(T)}, \tag{5}$$

acts in order to bring together two charges of the dipole, where Q is the charge magnitude, $\alpha(T)$ is the temperature dependent polarizability and x is the deflection of the ion from equilibrium value [18]. This electric force F_{loc} contributes to the elastic restoring force (see equations (2) and (3)), so the total restoring force can be expressed as

$$F_{res} = -\left(k + \frac{2\,Q^2}{\alpha(T)}\right) x. \tag{6}$$

The polarizability $\alpha(T)$ characterizes the competition between the potential energy of the electric dipole ($-\mathbf{p}.\mathbf{E}_{loc} = -\,pE_{loc}\cos(\theta)$) acting to orient the dipole in the direction of the electric field by means of the electric force and the thermal energy (k_BT) having tendency to disorder this dipole order. The polarizability of the quartz excited by the pulse can be expressed in form

$$\alpha(T) = \frac{3\varepsilon_0}{N < \cos(\theta) >} = \frac{3\varepsilon_0}{NL(X)}, \tag{7}$$

where ε_0 is the vacuum permittivity, N is the density of dipoles and $< \cos(\theta) >$ is the mean value of $\sum_i \cos(\theta)_i$, which is equal to the Langevin function $< \cos(\theta) >= L(X) = \coth(X) - 1/X$ with $X = p \cdot E_{loc}/(k_BT)$. Therefore, the frequency of the tuning fork oscillations f_{tf} is determined by two terms

$$f_{tf}^2(T) = \frac{k}{4\pi^2\, m_{eff}} + \frac{Q^2 NL(X)}{6\pi^2\,\varepsilon_0 m_{eff}} = f_0^2 + f_T^2(T). \tag{8}$$

While the first term, in presented model, corresponds to the temperature independent resonance frequency determined by the elastic properties of the quartz, the second term reflects the temperature contribution to the resonance frequency due to ordering effect provided by van der Waals interaction acting between dipoles.

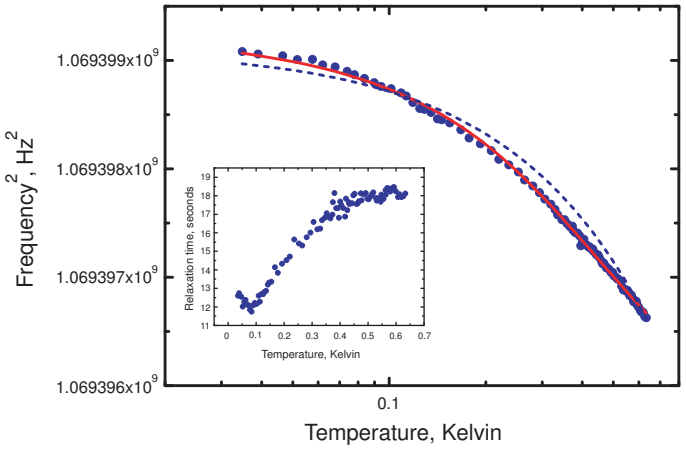

FIG. 3: (Colour online) Temperature dependence of the tuning fork resonance frequency squared. The solid line (red) is the fit to the experimental data using equation (8). Dashed line represents fit to the data using formula $f^2(T) = a + b \cdot Te^{-T_0/T}$. Inset shows the temperature dependence of the relaxation time τ determined from the same free decay signals.

Figure 3 shows the temperature dependence of the tuning fork resonance frequency squared measured in temperature range from 30 mK to 600 mK. The solid line (red) represents the fit to the experimental data using expression (8) in form of three fitting parameters: $f_{tf}^2 = a + b.L(T_c/T)$, where $a = f_0^2$, b is the constant characterizing the stiffness of the van der Waals interaction, $T_c = pE_{loc}/k_B$ is the critical temperature and $L(X)$ is above mentioned Langevin function. Presented model with fitting parameters $f_0 = 32701.605214\,\mathrm{Hz}$, $b = 4260.4\,\mathrm{Hz}^2$ and $T_c = 0.835\,\mathrm{K}$ shows very good qualitative agreement with the experimental data. It is worth to point out that value of $T_c = 0.835\,\mathrm{K}$ corresponds to the temperature of the quartz tuning fork transition to the high Q-value oscillation mode.

Now, let us discuss the influence of intrinsic damping process on tuning fork resonance frequency. As mentioned above, the intrinsic damping process is reflected in relaxation time constant $\tau(T)$ being determined experimentally from free decay signal (see Fig. 1), and measured as a function of temperature. The inset to the Fig. 3 shows observed temperature dependence of the relaxation time τ. Surprisingly, as temperature is lowered from 600 mK,

the relaxation time constant τ decreases as well, reaching its minimum (i.e. maximum in dissipation) at temperature of 70 mK. Then, on further cooling, the time constant τ increases again. However, in the same time, the resonance frequency continuously rises as the temperature is lowered, not being affected by damping process. This is in contradiction with properties of standard linear harmonic oscillators, where the resonance frequency depends on damping ($\omega^2 = \omega_0^2 - \gamma^2/4$).

The physical nature of the dissipation process acting during fork oscillations remains unclear up to now. However, a "Schottky-like anomaly" in temperature dependence of relaxation time constant τ at temperature of 70 mK suggests a presence of gentle thermally activated dissipation mechanism. Furthermore, the independence of the tuning fork resonance frequency on the damping reveals a presence of the damping mechanisms acting rather near the quartz surface than in its volume. As surface of the quartz tuning fork is covered by metal alloy (tin, silver, etc.), a Schottky barrier is formed on this interface due to difference in energy spectra between metal alloy and quartz [19]. This Schottky barrier, as might-be example, can open additional dissipation channel caused by thermally activated injection of electric charges from metal alloy to quartz, however, to elucidate this problem additional work needs to be done.

Figure 4 shows the distribution of the tuning fork resonance frequency measured at constant temperature of 22 mK. The data from the Gaussian fit to the experimental data demonstrate extremely well defined resonance frequency $f_{tf} = 32772.645720\,\text{Hz} \pm 9.71\,\mu\text{Hz}$ and relatively narrow width $\sigma = 429.11\,\mu\text{Hz} \pm 36.12\,\mu\text{Hz}$ corresponding to the thermal "fluctuations" of the resonance frequency. It is worth to note at this point, that the measured temperature is related to the temperature of the mixing chamber and we were not able to measure the temperature of the tuning fork separately. As the time scale of the measurements is of the order of nearly 100 seconds, the measured width related to the thermal "fluctuations" of the tuning fork may well be related to mixing chamber temperature oscillations caused by control process of the temperature stabilization.

Observed temperature dependencies of the tuning fork resonance frequency and relaxation time constant τ indicate that the system of oscillating dipoles in quartz tuning fork preserves the phase rigidity (the phase coherence) due to van der Waals interaction and can be treated as excited coherent state similar to that in the lasers. In order to check the presence of phase coherence in the system of oscillating dipoles in quartz tuning fork, we tried to excite the

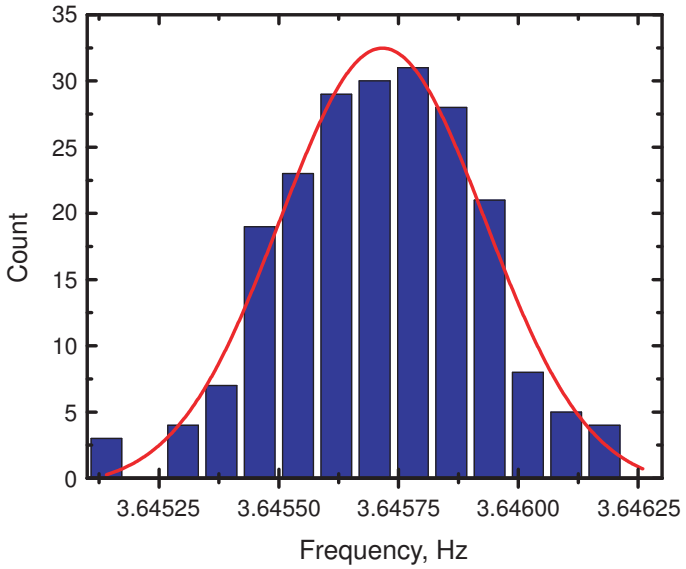

FIG. 4: (Colour online) Distribution of the tuning fork resonance frequency measured by the technique described above at constant temperature of $\sim 22\,\mathrm{mK}$. The line shows the Gaussian fit to the experimental data with parameters: the central frequency $f_0 = 3.645720$ Hz $\pm$ 9.71 μHz, the distribution width $\sigma = 429.11\,\mu\mathrm{Hz} \pm 36.12\,\mu\mathrm{Hz}$. The reference frequency was f_{ref}=32769.00000 Hz.

fork's oscillations using incoherent white noise signal, similar to the experiment preformed with Bose-Einstein condensate (BEC) of magnons [20].

The noise measurements were performed by applying the white noise signal with known bandwidth for 1 second period of time and amplitude of $5\,\mathrm{mV}_{rms}$ to the tuning fork. When noise signal is applied, the decay signal is not visible (see inset to Fig. 5). When the noise signal is switched off, a coherent decay signal from oscillating dipoles is observed as shown in inset to Fig. 5. Due to statistical nature of the noise signal, the measurements of the decay signal were repeated several times for given noise bandwidth. Figure 5 shows expected dependence of the signal initial amplitude as a function of noise bandwidth: the tuning fork is excited by white noise, when the frequency bandwidth of white noise includes the fork resonance frequency. It is worth to note that no decay signal was detected, when the noise signal having the bandwidth less than 18 kHz was applied.

To summarize - using the pulse excitation technique in combination with demodulation detection method we were able to measure the free decay signal from high Q-value tuning fork with resolution in frequency in the 9th order. This high sensitivity measurement technique

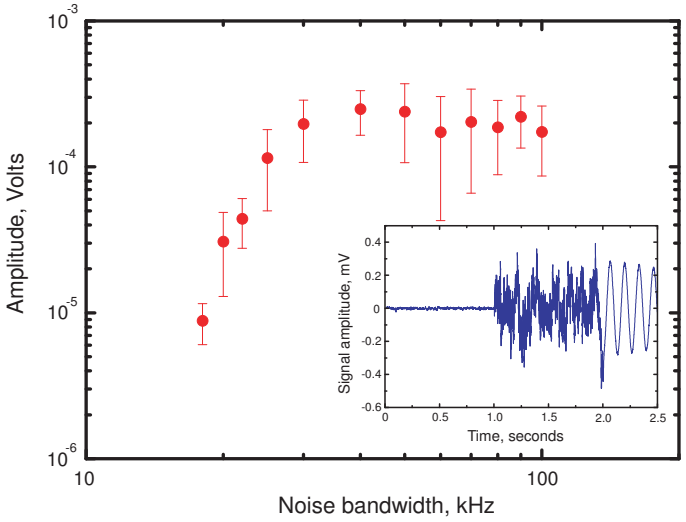

FIG. 5: (Colour online) Dependence of the initial signal amplitude as a function of frequency bandwidth of the noise signal applied to excite oscillations of the tuning fork. Measurements were performed at temperature of 25 mK. Inset shows the birth and formation of coherent signal from white noise signal being applied after one second idle state for the duration of another one second.

allowed to detect a fine dependence of the quartz tuning fork resonance frequency on temperature. Observed temperature dependencies of the tuning fork resonance frequency and relaxation time constant indicate that van der Waals interaction acting between oscillating dipoles increases the stiffness of their potential energy and preserves their phase coherence. The latter was confirmed using application of white noise for quartz excitation. A potential application of the quartz tuning fork as a thermometer in millikelvin temperature range can also be taken into account. As open questions remain the origin and nature of the damping mechanism and whether there is a possibility for oscillating electric dipoles to create and form a BEC. Physics of the BEC has been extended also to a system of various excitations assuming that these excitations are living for sufficiently long time and an interaction acting between these excitations allow them to form the B-E condensate [21, 22].

[1] Collin, E., Bunkov, Yu. M. & Godfrin H. Addressing geometric nonlinearities with cantilever microelectromechanical systems: Beyond the Duffing model. *Phys. Rev. B* **82**, 235416 (2010).

[2] Človečko, M. *et al.* Vacuum Measurements of a Novel Micro-resonator Based on Tin Whiskers

Performed at mK Temperatures. *J. Low Temp. Phys.* **175**, 449 (2014).

[3] Cleland, A. N. & Roukes, M. L. Noise processes in nanomechanical resonators. *J. Appl. Phys.* **92**, 2758 (2002).

[4] Ekinci, K. L. & Roukes, M. L. Nanoelectromechanical systems. *Rev. Sci. Instrum.* **76**, 061101 (2005).

[5] Remus, L. G., Blencowe, M. P. & Tanaka, Y. Damping and decoherence of a nanomechanical resonator due to a few two-level systems. *Phys. Rev. B* **80**, 174103 (2009).

[6] Maillet, O., Vavrek, F., Fefferman, A. D., Bourgeois, O. & Collin, E. Classical decoherence in a nanomechanical resonator. *arXiv*:1511.02120v3 [cond-mat.mes-hall].

[7] Sansa M. *et al.* Frequency fluctuations in silicon nanoresonators. *arXiv*:1506.08135v5 [cond-mat.mes-hall].

[8] Blaauwgeers, R. *et al.* Quartz Tuning Fork: Thermometer, Pressure- and Viscometer for Helium Liquids. *J. Low Temp. Phys.* **146**, Nos.5/6 537 (2007).

[9] Rychen, J., Ihn, T., Studerus, P., Hermann, A. & Ensslin, K. A low-temperature dynamic mode scanning force microscope operating in high magnetic fields. *Rev. Sci. Instrum.* **70**, 2765 (1999).

[10] Rychen, J. *et al.* Operation characteristics of piezoelectric quartz tuning forks in high magnetic fields at liquid helium temperatures. *Rev. Sci. Instrum.* **71**, 1695 (2000).

[11] Castellanos-Gomez, A., Agrait, N. & Rubio-Bollinger, G. Dynamics of quartz tuning fork force sensors used in scanning probe microscopy. *Nanotechnology* **20**, 215502 (2009).

[12] Človečko, M., Gažo, E., Kupka, M., Skyba, M. & Skyba, P. High Quality Tuning Forks in Superfluid ^{3}He-B Below 200 μK. *J. Low Temp. Phys.* **162**, 669 (2011).

[13] Holt, S. & Skyba P. Electrometric direct current I/V converter with wide bandwidth. *Rev. Sci. Instrum.* **83**, 064703 (2012).

[14] Skyba P. Notes on Measurement Methods of Mechanical Resonators Used in Low Temperature Physics. *J. Low Temp. Phys.* **160**, 219 (2010).

[15] Wachtman, J. B., Tefft, W. E., Lam, D. G. & Apstein, C. S. Exponential Temperature Dependence of Young's Modulus for Several Oxides. *Phys. Rev.* **122**, 1754 (1961).

[16] Anderson, O. L. Derivation of Wachtman's Equation for the Temperature Dependence of Elastic Moduli of Oxide Compounds. *Phys. Rev.* **144**, 533 (1966).

[17] www.crystaltechno.com

[18] Blakemore, J. S. *Solid State Physics* (Second edition, Cambridge University Press, Cambridge, 1985).

[19] Tersoff, J. Schottky Barrier Heights and the Continuum of Gap States. *Phys. Rev. Lett.* **52**, 465 (1984).

[20] Fisher, S. N., Guénault, A. M., Pickett, G. R. & Skyba, P. A spin laser? The persistent precessing domain in superfluid ^{3}He-B at ultralow temperatures. *Physica B* **329-333**, 80 (2003).

[21] Snoke, D. Condensed matter physics: Coherent questions. *Nature* **443**, 403 (2006).

[22] Bunkov, Yu. M. & Volovik, G. E. Bose-Einstein Condensation of Magnons in Superfluid ^{3}He. *J. Low Temp. Phys.* **150**, 135 (2008).

Acknowledgements

We acknowledge Dr. M. Kupka for stimulating discussions. This work was supported by projects APVV-0605-14, (former project APVV-0036-11), VEGA 2/0157/14, EU project erdf-itms 26220120005 (Extrem-1), and partially by the European Microkelvin Platform (former project of 7th FP of EU - Microkelvin) as well as by the U.S. Steel Košice.

Author contributions

Idea of experiment, the method of measurements and theoretical interpretation was suggested by P.S. M.Č. and F.V. contributed to the experiment preparation and realization and they developed and tested the LabView programs for pulse measurements of quartz tuning forks. All authors participated on the data measurements and theoretical analysis of data. The paper was written by P.S. with contribution of M.Č. and F.V.